



## DOLPHIN CHAIR

Design Işıl Yılmaz, 2015

Inspired by the dolphins' natural curves, the Dolphin family grabs attention with its style as much as being elite. Dolphin provides comfort with its ergonomic structure and high back. Visit the dolphin family page to see all members and choose the most suitable product for your project.

Seat	PU moulded foam with metal skeleton.
Legs	Stained oak wood or powder coated metal. Available on <a href="http://5adesign.com.tr/materials/finishes/">5adesign.com.tr/materials/finishes/</a>
Feet	Polypropylene, black glides
Upholstery	Available on <a href="http://5adesign.com.tr/materials/fabrics/">5adesign.com.tr/materials/fabrics/</a>



### BODY CONFIGURATIONS



Without Cushion




With Cushion

### DIMENSIONS & PACKAGING

Body configurations above have the same product dimensions and packaging data.




Tiffany

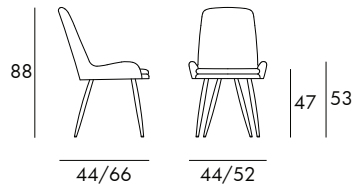

Disassembled	2 pcs	18.4 kg	0.31 m <sup>3</sup>
--------------	-------	---------	---------------------



Sled

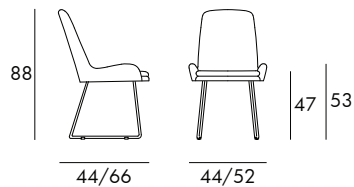


Disassembled	2 pcs	22.4 kg	0.31 m <sup>3</sup>
--------------	-------	---------	---------------------

# DOLPHIN CHAIR

Design Işıl Yılmaz, 2015



Oak

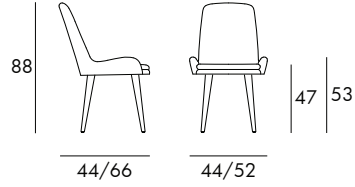

Disassembled



2 pcs




20.2 kg



0.31 m<sup>3</sup>



Spider Metal

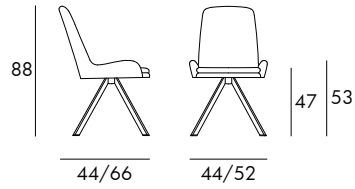

Disassembled



2 pcs




20.1 kg



0.31 m<sup>3</sup>



Vito

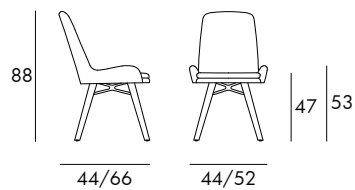

Disassembled



2 pcs




17.6 kg



0.31 m<sup>3</sup>



Spider Oak

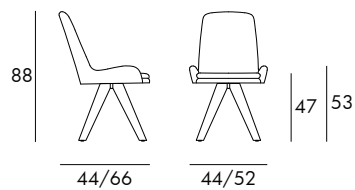

Disassembled



2 pcs




20.6 kg



0.31 m<sup>3</sup>



Office Metal

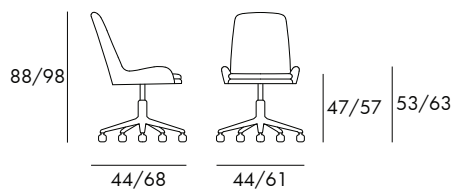

Disassembled



2 pcs



23.6 kg



0.31 m<sup>3</sup>


5A

# DOLPHIN CHAIR


Design Işıl Yılmaz, 2015



Office Poliamid

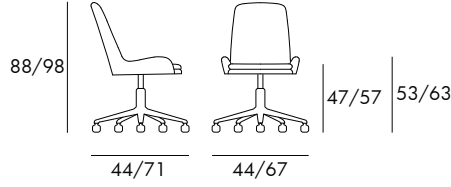

Office Aluminium

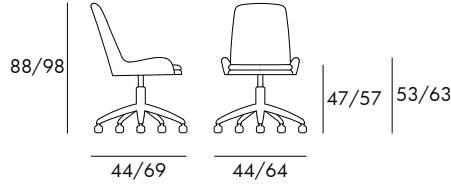

## COMPANY CERTIFICATIONS

ISO 45001  
Health & Safety Management System  
(OHSAS-18001)



ISO 14001  
Environmental Management System  
(ISO-IAS accredited)



ISO 9001  
Quality Management System  
(ISO-IAS accredited)



## MATERIAL CERTIFICATIONS

### UV Resistant Coating

EN 12720:2014  
Resistance to Chemical Agents  
(CEN/TS 16209:2011)

EN 12722:2014  
Resistance to Dry Heat



### Polyurethane

BS 5852  
Flammability Test  
Part 2: 1982 (\*)– Ignition Source 5